

Classic (L-10)



Through-Feed Booth for manual coating

The manual coating booth Classic L-10 is designed for the double-sided manual coating with a conveyor system. But this booth can be used as simple automatic system as well.

The Advantages of the Classic Standard Booth:

- Powder coated steel booth
- Stainless steel booth floor
- Integrated Illumination
- 2 mobile 80 l powder collecting hoppers
- Service doors for simplified filter cartridge changing
- Supervision of minimal exhaust air volume

Technical Data



(Standard-Styling)



A:	min. 200
B:	1400 / 1800 mm
H2:	min. 100 mm
H3:	min. 300 mm
FH:	750, if $H1 \leq 1400$ mm 1200, if $H1 > 1400$ mm
L1:	600, if $H1 \leq 1400$ mm 1300, if $H1 > 1400$ mm

Filter:	2 x 5 Filter cartridges
Filter area:	2 x 48,75 m ² , if FH = 750 2 x 78,00 m ² , if FH = 1200
Filter Cleaning:	Jet with Venturi
Power:	2 x 3,0 kW, 3 x 380 - 420 V, 50 Hz
Exhaust air:	nominal: 2 x 6200 m ³ /h working range: 2 x 4500 - 5100 m ³ /h
Air consumption:	- with powder collecting hoppers: 2 x max. 15 Nm ³ /h - without powder collecting hoppers: 2 x max. 50 Nm ³ /h
Option:	30 l powder hoppers, fluidized with vibrating sieves

other dimensions on request

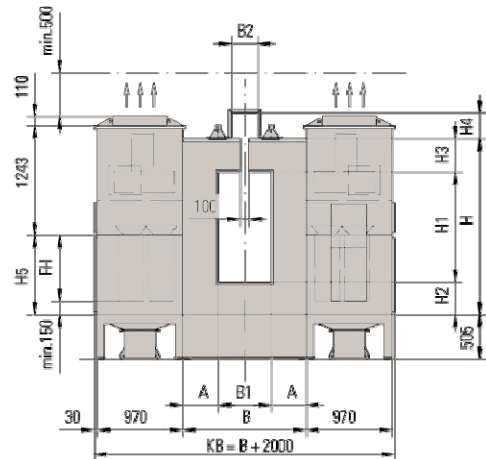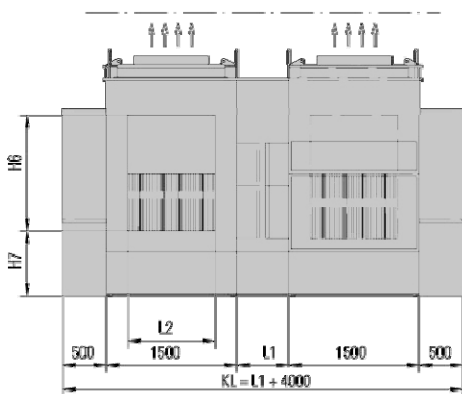

ITW Gema reserves the right to make technical changes without prior notice!

009686-EN