



ClassicLine Manual Booths

compact
flexible
powerful

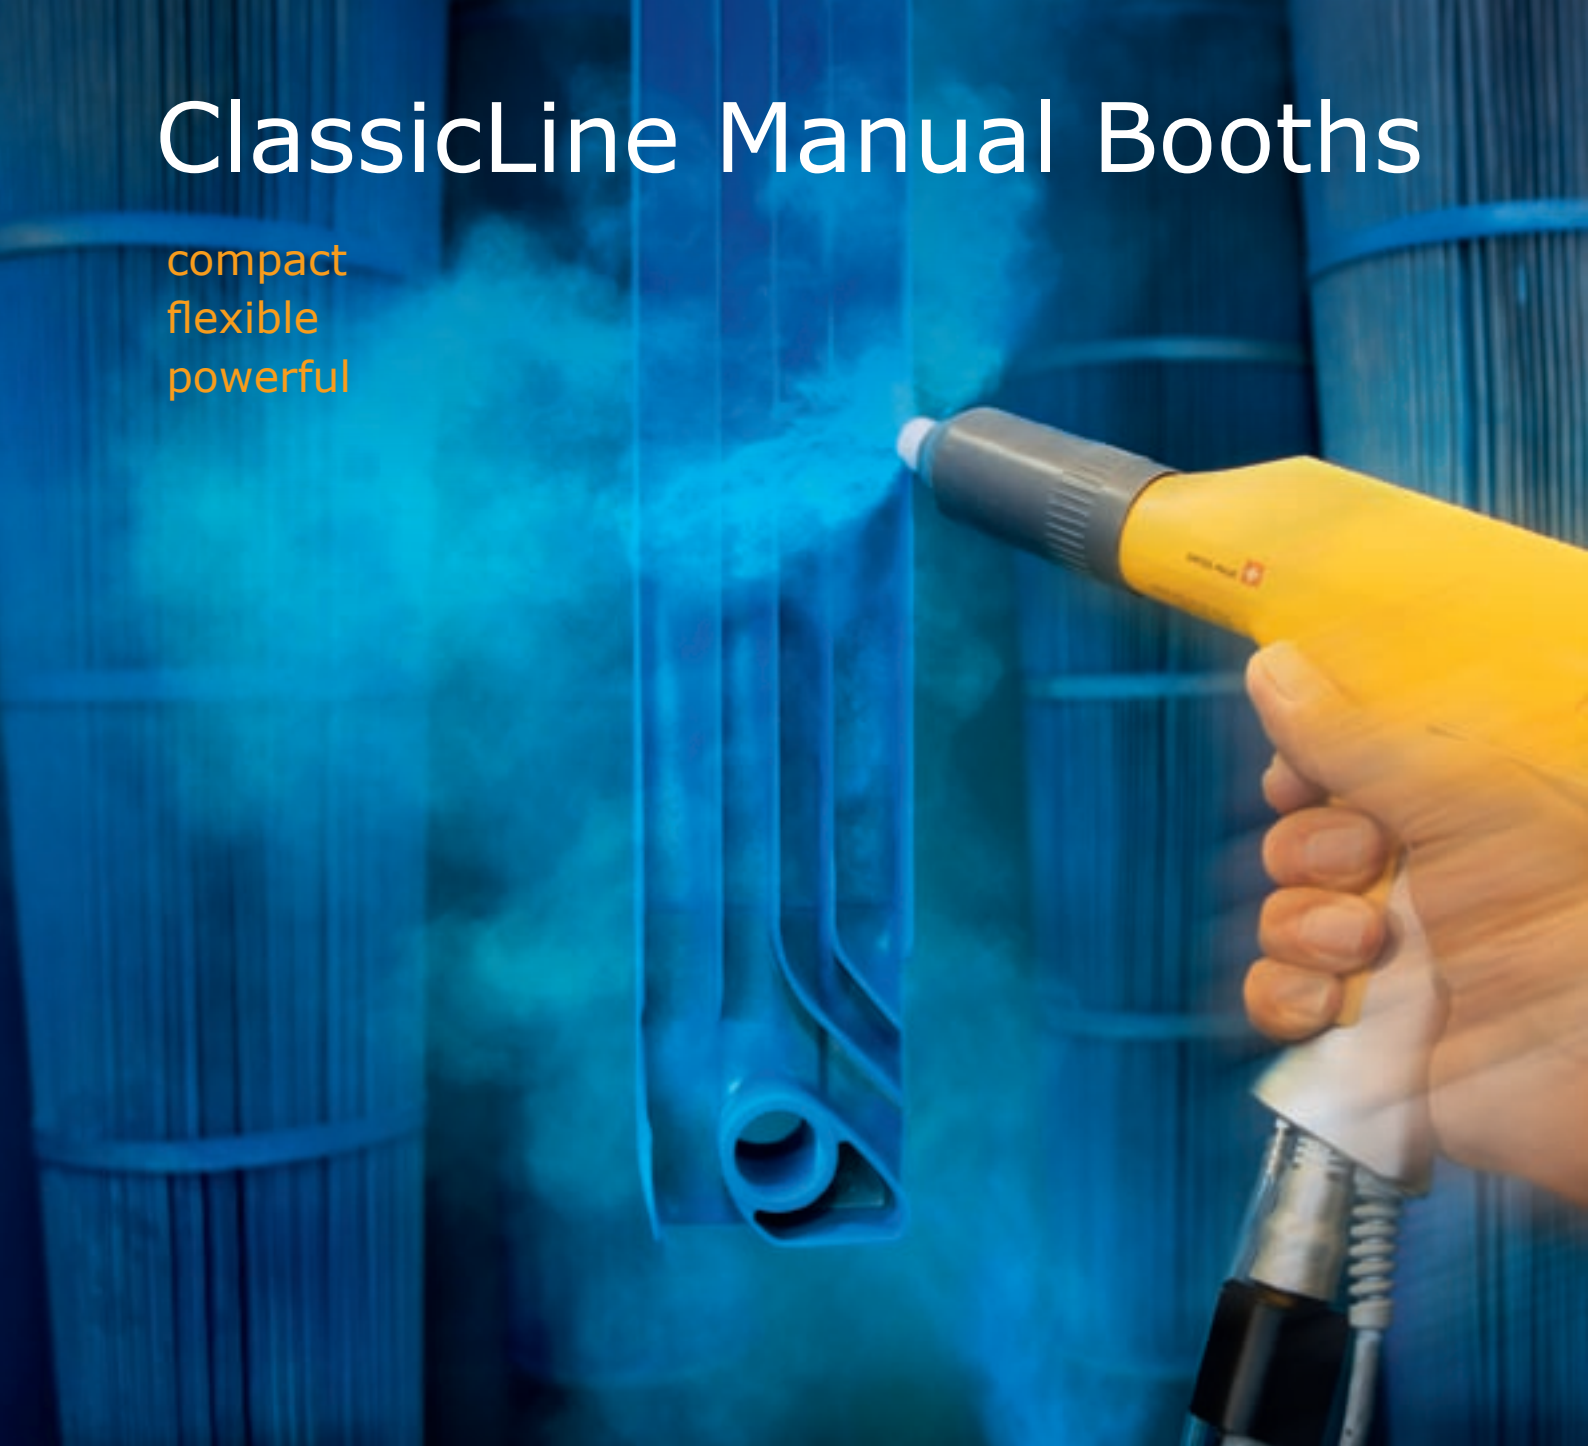

Manual booths by ITW Gema are ideal for the whole range of manual coating from small series to volume production. The modular structure of this range of booths means that there is always a perfect solution for every need. Moreover, ATEX-compliant components guarantee utmost safety.

ClassicOpen

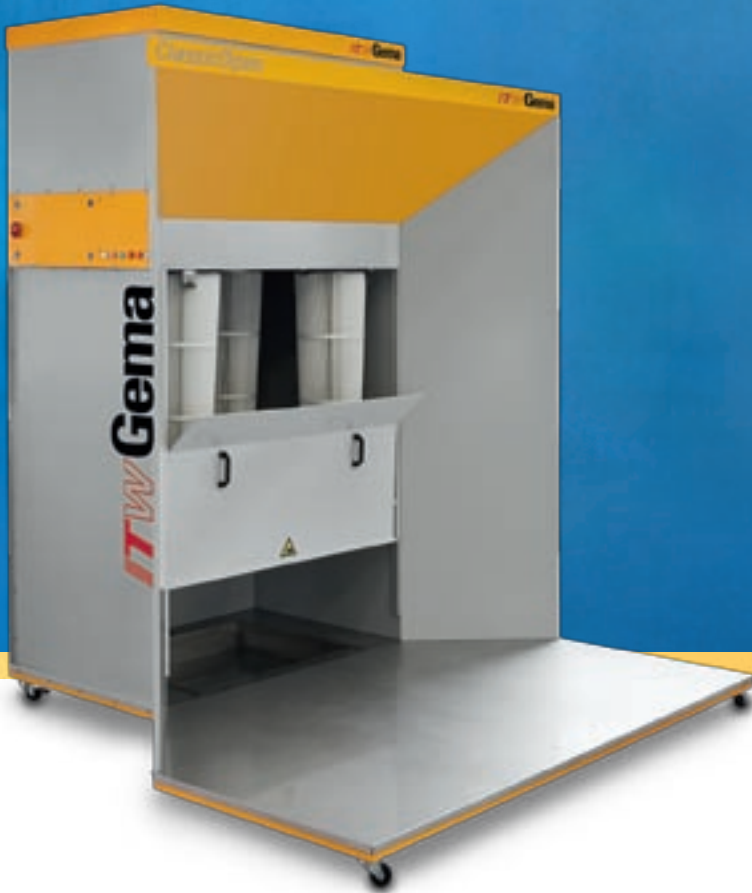

ClassicStandard 2



compact

Regardless of whether you opt for a Classic-Standard, ClassicOpen or an extraction unit for attachment to a special booth, the manual booths in our ClassicLine are always just right for your needs. A space-saving design, integrated functions and ease of operation provide ideal conditions for efficient and high quality manual coating.

flexible

ClassicLine manual booths are the right solution for every application: for new start up and experienced users alike, or as a one-off solution for small or medium series. You have the choice between a compact standard design and an open version for particularly voluminous parts. You can also adjust the extraction capacity to your particular needs: 4000 Nm³/h are perfect for smaller coating tasks, while 6600 Nm³/h are ideal for larger items.

ClassicStandard 4



Classic Exhaust Air Unit



powerful

The powder-coated steel booth provides a well-lit and bright working space. The minimum air extraction volume is monitored constantly and an acoustic warning reminds you in good time to clean the filter or that a filter change is due. With the easy-change cartridges and stainless steel base color changing is child's play for the user!

**Compliance and safety label:
ATEX compliance guarantees
highest level of safety**

	ClassicOpen	ClassicStandard 2	Classic Exhaust Air Unit 2	ClassicStandard 4	Classic Exhaust Air Unit 4
No. of filter elements	4	2	2	4	4
Extraction volume, rated	6600 Nm ³ /h	4000 Nm ³ /h	4000 Nm ³ /h	6600 Nm ³ /h	6600 Nm ³ /h
Fan power, effective	4,0 kW	2,2 kW	2,2 kW	4,0 kW	4,0 kW
Voltage/Frequency	3 × 380–420 V / 50 Hz				
Compressed air consumption	15 Nm ³ /h / 6[bar] input pressure				
Noise level	<78 dBA				
Weight (approx.)	635 kg	580 kg	445 kg	625 kg	475 kg
Reception tank	–	80 l	80 l	–	–
Booth dimensions					
<i>Width</i>	2465 mm	1463 mm	1463 mm	1463 mm	1463 mm
<i>Depth</i>	2390 mm	1940 mm	940 mm	1940 mm	940 mm
<i>Height</i>	2810 mm	2810 mm	2810 mm	2810 mm	2810 mm



Your global partner for high quality powder coating

ITW Gema GmbH, Mövenstrasse 17, 9015 St. Gallen / Switzerland

Phone +41 71 313 83 00, Fax +41 71 313 83 83

Mail info@itwgema.ch, Web www.itwgema.com

ITW Gema GmbH reserves the right to make technical modifications without prior notice. Illustrations in this leaflet may contain optional equipment and do not necessarily show the standard configuration. MagicCenter, OptiSpeeder, MagicCompact, MagicCylinder, OptiFlex, OptiStar, OptiGun, OptiSelect, MagicControl, OptiControl and OptiFlow are registered trademarks of ITW Gema.

